


# Liberty Platinum Sound System

Portable Sound System



The Liberty Platinum is the fourth generation in the twenty year history of the Liberty. It just keeps getting better with advances in audio technology, music players, LED development and speaker performance.

The Liberty Platinum maintains the integrity of the very first Anchor product - Intelligible Sound, Reliable Performance and Simplicity of Use.

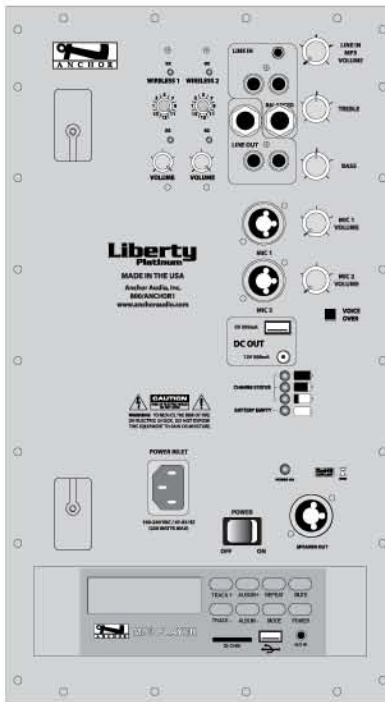

## Features

- Reach Crowds of 2,000+
- AC Mode = 125W / DC Mode = 100W
- Single or Dual Built-in UHF Wireless w/ 16 User Selectable Channels
- Built-In MP3 Player Accepts SD Card, USB Flash Drive or 3.5mm input for iPod
- USB Port for Charging MP3/iPod®
- "Voice Over" Music Ducking Feature
- Two Universal Mic Input Jacks
- Recessed Back Panel Protects Knobs and Ports
- True AC/DC - 110/220V Power Supply
- Ceramic Compression Driver
- 10" Neodymium Woofer
- Proprietary Class D Amplifier
- User Replaceable Batteries
- Charging LED Bar Indicator
- Operates 6-8 hrs on a Single Charge
- Speaker Out to Power Companion Speaker

## LIBERTY ACCESSORIES

MIC-90	Professional dynamic, cardioid pattern handheld microphone
NL-7500	Nylon Slip Cover
HC-1640	Pelican hard case
MP3-TOTE	Holds MP3 Player & Mic

## LIBERTY MODELS

LIB-7500	AC/DC powered sound system
LIB-7500M	Built-in MP3 player
LIB-7500U1	1 built-in wireless receiver
LIB-7500U2	2 built-in wireless receivers
LIB-7500MU1	Built-in MP3 player & 1 built-in wireless receiver
LIB-7500MU2	Built-in MP3 player & 2 built-in wireless receivers
LIB-7501	Unpowered speaker

## UHF WIRELESS

WH-6000	Wireless Handheld mic/transmitter
WB-6000	Wireless body-pack transmitter w/ handsfree microphone.
Mic options include:	
Over-the-Ear/EM-60T, Lapel/LM-60, Collar/CM-60, Headband/HBMTA4F	

## TECHNICAL SPECIFICATIONS

Rated Power Output	125 watts AC / 100 watts DC	Mic Inputs:	Lo-Z (1 K $\Omega$ ), balanced, XLR
Max SPL @ Rated Power	110 dB		12 VDC condenser mic (phantom) power
Battery	Two 12 Volt rechargeable, 9.0 AH Full recharge: approx 7 hrs.		Hi-Z (10 K $\Omega$ ), unbalanced, 1/4" phone
Frequency Response	60 Hz - 15 kHz $\pm$ 3dB		Hi-Z (10 K $\Omega$ ), unbalanced, 1/8" stereo, 1/4" phone
Line Output (post fader)	isolated, 600 ohm, 1/4" phone	Line In/Out	unbalanced, stereo RCA
AC Power Reqs.	100 - 240 VAC, 50/60 Hz, 300W max	Sensitivity For Rated Output	
DC Out	12V 500mA	Lo-Z Microphone	-52 dBV (2.5 mVrms)
USB	5V 500mA	Hi-Z Microphone	-43 dBV (7.5 mVrms)
Dimensions (HWD)	22" x 14" x 11.5" (56 x 35.6 x 29.2 cm)	Auxiliary (line)	-14 dBV (200 mVrms)
Weight	38 pounds / 17 Kg	Phantom Power	36V
		Speaker Out	8 ohm Speaker

(Features & Specifications Subject to Change Without Notice)



**Anchor Audio, Inc.**  
Portable Sound Systems

[www.imaginarart.es](http://www.imaginarart.es) T. 902 202030 **imaginArt**  
imaginArt, importador oficial de Anchor Audio en España

S-L/0509